


TRADITIONAL ✓ LONG STRIP ✓

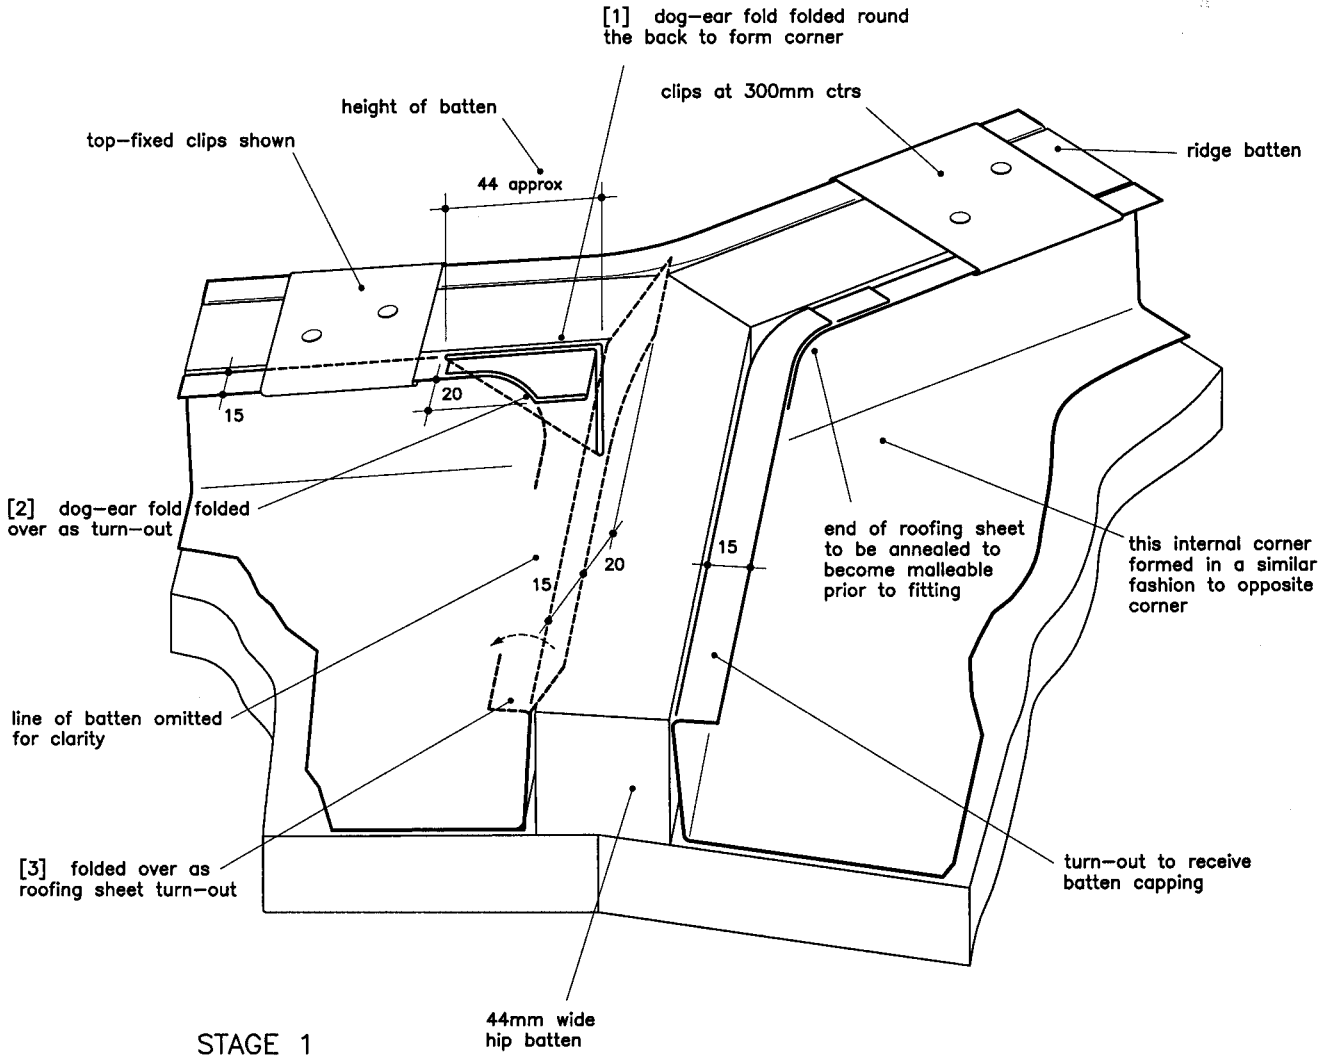

STAGE 1

- \* In all but the most exposed situations, the top layer of the dog-ear fold folded over in [2] can be snipped off. This reduces the number of copper thicknesses to be worked and therefore makes the job easier.
- \* The detail can also be used in Long Strip roofing, the only difference being the allowance for movement shown in Fig 48b opposite.
- \* Ridge and hip battens are often used with double-lock standing seam roofing as shown in Fig 19 (p60).
- \* As far as the setting out of roofing bays is concerned, both batten roll and double-lock standing seams can line up on either side of the batten ridge or hip.
- \* Joints in cappings are covered with Fig 23 (p64) and in Fig 12b (p48).


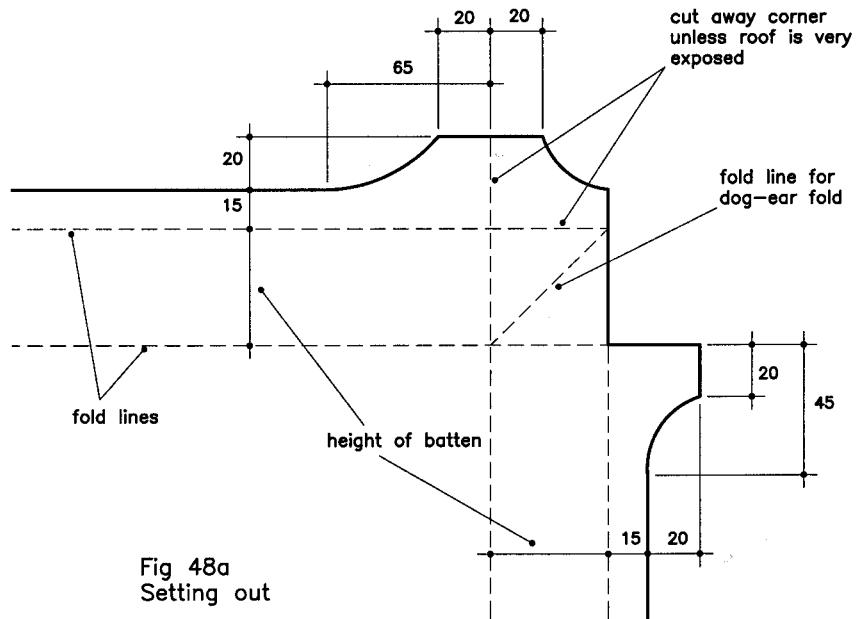


Fig 48a Setting out

Temper: soft or quarter-hard preferably. Half-hard is possible but more difficult to work neatly in this situation.  
Thickness: 0.6mm or 0.7mm

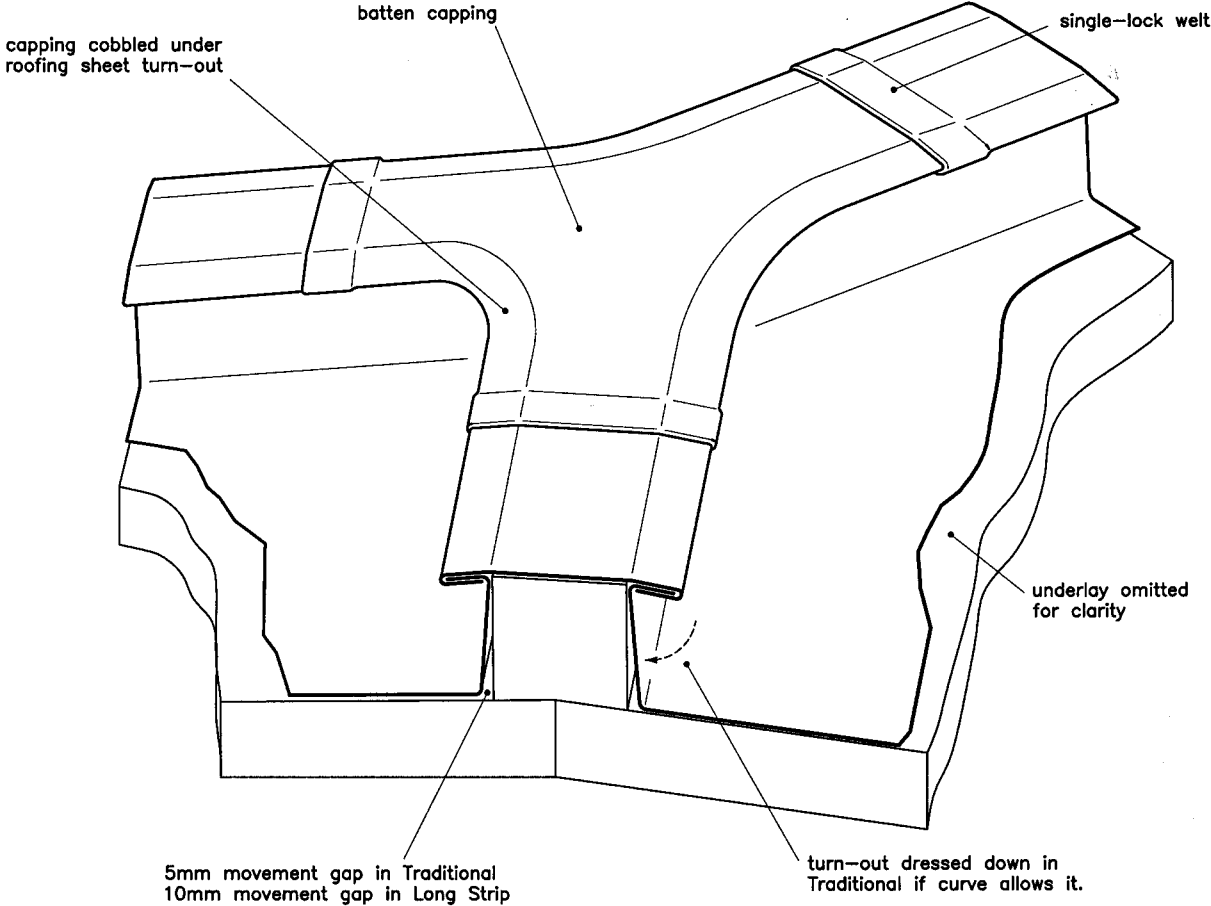

STAGE 2

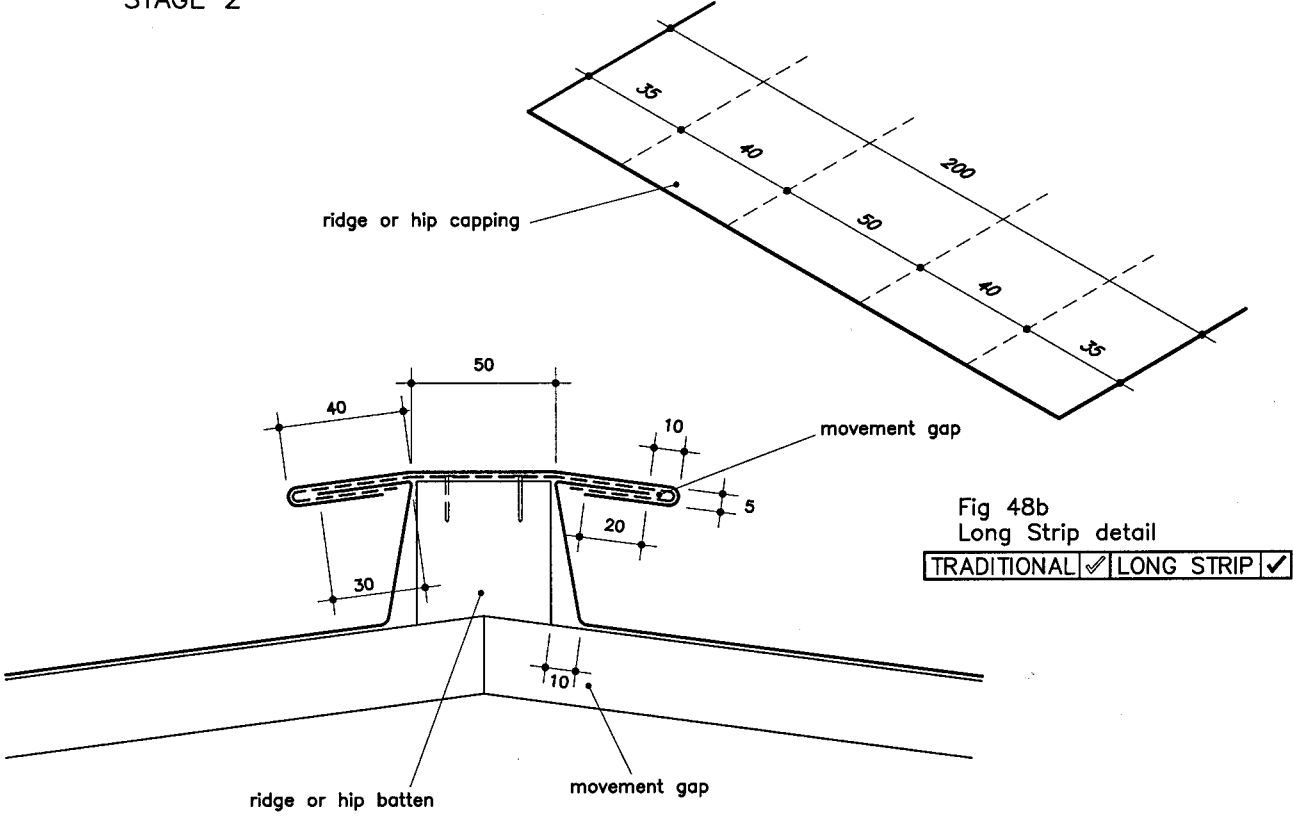


Fig 48b Long Strip detail

TRADITIONAL	✓	LONG STRIP	✓
-------------	---	------------	---